

FL FURNACE

60 liters

Technical Datasheet



Design and production of custom-made furnaces

We specialize in the design and manufacturing of industrial furnaces used in processes that require precise temperature control.

www.samothermal.com



**hornos
samo thermal**



samothermal

Technical datasheet

FL FURNACE

60 liters

APPLICATIONS

- Non-ferrous metal casting
- Soil analysis
- Chemical laboratories
- Mining
- 3D jewelry
- Dental mechanics
- Glass fuse
- Ceramics

FEATURES:

Electronic programmer with storage capacity for 4 programs of 8 segments each, featuring ramp hold fire programs. It also includes pre-loaded programs for direct cone firing in ceramics. Finally, it has a delay and automatic program end alarm.

Internal Chamber dimensions:

Height: 40 cm
Width: 40 cm
Depth: 40 cm

External dimensions:

Height: 55 cm
Width: 55 cm
Depth: 55 cm

Volume: 60 liters

Internal Chamber Material:

High alumina refractory bricks

Continuous Temperature: 1250°C

Extra Insulation: NO

Current: 30A

Tension: 220V

Power: 6600 Watts

Number of Phases: 2

Thermocouple:

Type K with ceramic coating.


Heating Elements:

Spiral wire of Kanthal alloy

Temperature Measurement

Variation: $\pm 1^{\circ}\text{C}$

Switch: It has a switch for turning the oven on and off.

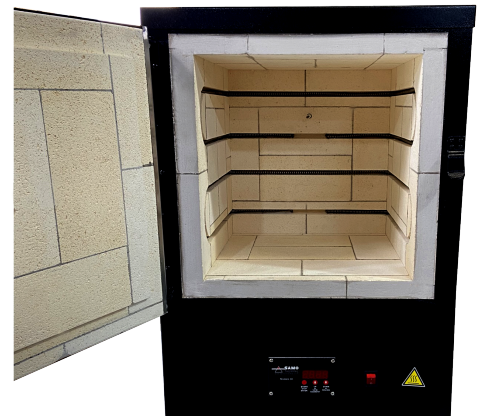

Warranty: 1 year against manufacturing defects.
Delivery time: 2 to 3 weeks.

